

# Hex - Power Resistors






## STANDARD RESISTANCE VALUES PART NUMBERS

CONTINUOUS CURRENT	300 WATTS PART NO. OHMS	450 WATTS PART NO. OHMS	600 WATTS PART NO. OHMS	750 WATTS PART NO. OHMS	900 WATTS PART NO. OHMS	1050 WATTS PART NO. OHMS	1200 WATTS PART NO. OHMS
25.1 AMPS	222200 0.432	222240 0.688	222280 0.943	222320 1.20	222360 1.45	222400 1.71	222440 1.97
22.4	222201 0.540	222241 0.860	222281 1.18	222321 1.50	222361 1.82	222401 2.14	222441 2.46
20.0	222202 0.676	222242 1.08	222282 1.49	222322 1.89	222362 2.30	222402 2.70	222442 3.10
17.7	222203 0.858	222243 1.37	222283 1.89	222323 2.40	222363 2.91	222403 3.42	222443 3.93
16.6	222204 0.976	222244 1.56	222284 2.14	222324 2.73	222364 3.31	222404 3.90	222444 4.48
15.8	222205 1.08	222245 1.73	222285 2.38	222325 3.02	222365 3.66	222405 4.32	222445 4.96
14.8	222206 1.23	222246 1.97	222286 2.70	222326 3.44	222366 4.17	222406 4.90	222446 5.65
14.1	222207 1.38	222247 2.19	222287 3.00	222327 3.82	222367 4.63	222407 5.45	222447 6.26
13.2	222208 1.56	222248 2.48	222288 3.41	222328 4.33	222368 5.26	222408 6.18	222448 7.10
12.6	222209 1.72	222249 2.74	222289 3.75	222329 4.77	222369 5.79	222409 6.80	222449 7.82
11.7	222210 1.99	222250 3.16	222290 4.33	222330 5.50	222370 6.68	222410 7.85	222450 9.03
11.1	222211 2.20	222251 3.52	222291 4.82	222331 6.13	222371 7.45	222411 8.76	222451 10.1
10.4	222212 2.52	222252 4.00	222292 5.48	222332 6.95	222372 8.45	222412 9.93	222452 11.4
9.8	222213 2.80	222253 4.45	222293 6.12	222333 7.78	222373 9.45	222413 11.1	222453 12.7
9.2	222214 3.16	222254 5.03	222294 6.91	222334 8.78	222374 10.7	222414 12.5	222454 14.4
8.8	222215 3.46	222255 5.50	222295 7.55	222335 9.60	222375 11.6	222415 13.7	222455 15.7
8.3	222216 3.94	222256 6.28	222296 8.60	222336 11.0	222376 13.3	222416 15.6	222456 18.0
7.9	222217 4.36	222257 6.95	222297 9.55	222337 12.1	222377 14.7	222417 17.3	222457 19.9
7.3	222218 5.08	222258 8.08	222298 11.1	222338 14.1	222378 17.1	222418 20.1	222458 23.1
7.0	222219 5.52	222259 8.78	222299 12.0	222339 15.3	222379 18.6	222419 21.8	222459 25.1
6.5	222220 6.50	222260 10.3	222300 14.1	222340 17.9	222380 21.6	222420 25.4	222460 29.3
6.2	222221 6.96	222261 11.1	222301 15.3	222341 19.4	222381 23.5	222421 27.7	222461 31.8
5.8	222222 7.92	222262 12.6	222302 17.3	222342 22.0	222382 26.7	222422 31.4	222462 36.0
5.5	222223 8.82	222263 14.0	222303 19.1	222343 24.3	222383 29.5	222423 34.7	222463 39.9
5.2	222224 10.1	222264 16.0	222304 21.9	222344 27.9	222384 33.8	222424 39.8	222464 45.7
4.9	222225 11.0	222265 17.6	222305 24.2	222345 30.8	222385 37.3	222425 44.0	222465 50.5
4.6	222226 12.6	222266 20.1	222306 27.6	222346 35.1	222386 42.6	222426 50.0	222466 57.6
4.1	222227 16.1	222267 25.6	222307 35.0	222347 44.5	222387 54.0	222427 63.7	222467 73.2
3.6	222228 20.2	222268 32.1	222308 44.0	222348 56.0	222388 67.8	222428 80.0	222468 91.7
3.2	222229 25.4	222269 40.5	222309 55.5	222349 70.7	222389 85.7	222429 101.0	222469 116.0


Wattage rating based on 375°C rise above an ambient of 40°C.

# Hex - Power Resistors

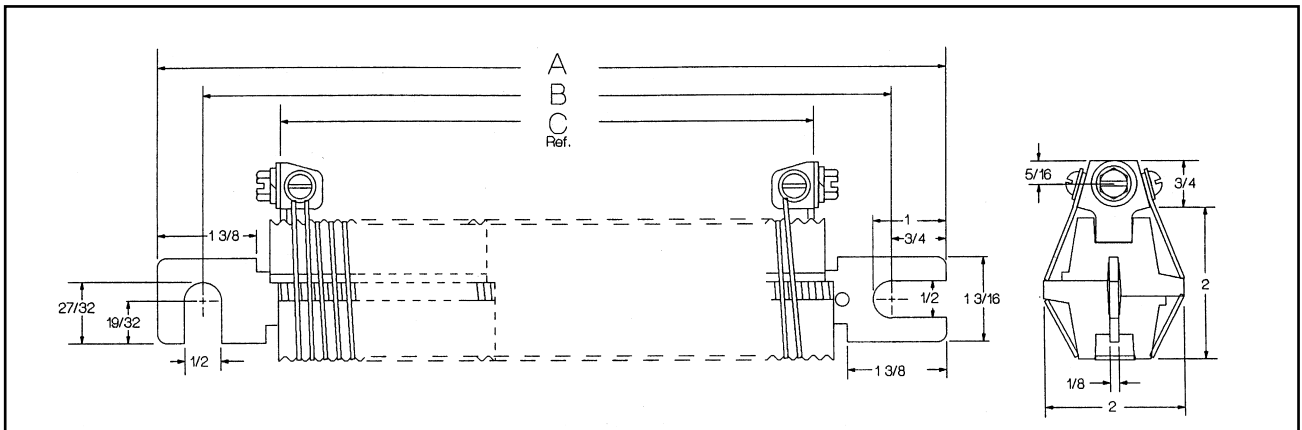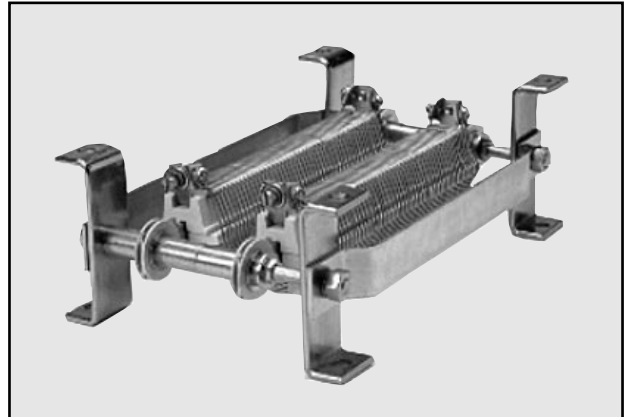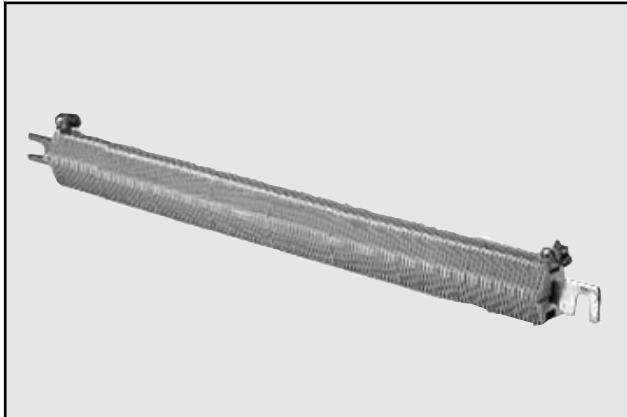

FORM 2			FORM 3			FORM 4			FORM 5			FORM 6			FORM 7			FORM 8		
300 WATT			450 WATT			600 WATT			750 WATT			900 WATT			1050 WATT			1200 WATT		
A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
8%	7%	5%	12%	11	8%	15%	14	11%	18%	17	14%	21%	20	17%	24%	23	20%	27%	26	23%

(All dimensions in inches)

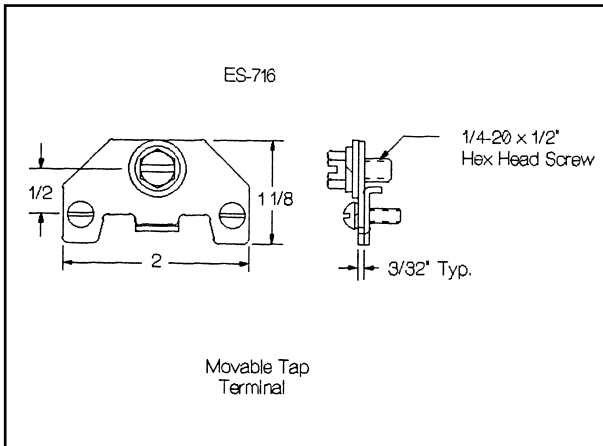

(All dimensions in inches)

